



## German fire-rated door T30 H8-5

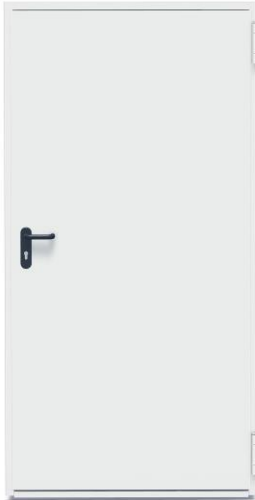

- Steel door leaf is 45 mm thick, 0.9 mm galvanized steel sheet with 2-sided rebate, door leaf with mineral wool filling, steel profile reinforced leaf, fire-rated seals
- Special corner frame from galvanized steel profiles: 2 mm thick.
- Door primed with powder RAL 9002.
- Deadlock fitted for cylinder Pz, Bb key and temporary Bb cylinder.
- Set of lever handles Pz/Bb (polypropylene) from round profile, all-round ends, black.
- Other handle options and colours are available.
- Spring hinges as per DIN 18272
- Ready-to-fit door set.

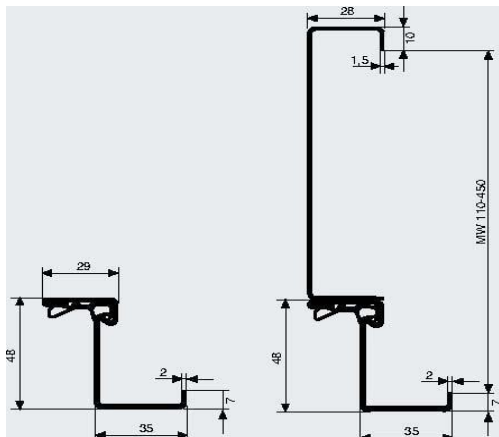

Wall opening dimensions Ordered dimension			Nominal dimensions			Clear opening dimensions		
700	x	2000	690	x	1995	632	x	1966
800	x	2000	790	x	1995	732	x	1966
900	x	2000	890	x	1995	832	x	1966
1000	x	2000	990	x	1995	932	x	1966
1100	x	2000	1090	x	1995	1032	x	1966
1178	x	2000	1168	x	1995	1110	x	1966
700	x	2100	690	x	2095	632	x	2066
800	x	2100	790	x	2095	732	x	2066
900	x	2100	890	x	2095	832	x	2066
1000	x	2100	990	x	2095	932	x	2066
1100	x	2100	1090	x	2095	1032	x	2066
1178	x	2100	1168	x	2095	1110	x	2066

