

# WINDOW TKO 2+1

## SPECIFICATIONS


Design	Inward opening double-framed wood-aluminium window
Openings	Tilt and turn window (Dreh-kipp)
Depth of the frame	106 mm
Glass	4 mm glass in the outer frame, double pane sealed unit with 24 mm thickness in the inner frame
Handle	HOPPE
Finishing	Standard: white, special colours according to RAL catalogue and stain according to Tikkurila Valtti Akvacolor catalogue



## PERFORMANCE

### CHARACTERISTICS

Thermal transmittance	1.0–0.84 W/m <sup>2</sup> K, dependent on the sealed unit
Sound insulation	R <sub>w</sub> 37–46 dB, dependent on the sealed unit
Air permeability	Class 4
Resistance to wind load	Class C3
Water tightness	Class E1200

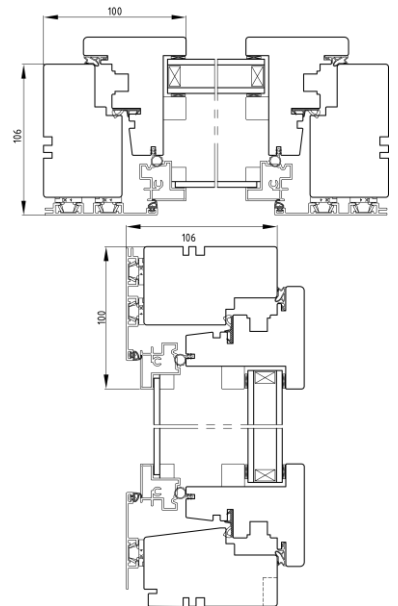

## MEASUREMENTS

Modular sizes	Outer measure of the frame = measure of the opening – 20 mm
Min./max. width	M4/M16
Min./max. height	M5/M21

## ACCESSORIES

Glazing bars	YES
Venetian blind	YES
Screen door	NO
Ventilation valve	YES

