

## BALCONY DOOR TKOD

### SPECIFICATIONS


Design	Outward opening double-framed wood-aluminium balcony door
Openings	Side opening
Depth of the frame	106 mm
Glass	4 mm glass in the outer frame, double pane sealed unit with 24 mm thickness in the inner frame
Handle	HOPPE
Finishing	Standard: white, special colours according to RAL catalogue and stain according to Tikkurila Valtti Akvacolor catalogue



### PERFORMANCE

#### CHARACTERISTICS

Thermal transmittance	1.0–1.1 W/m <sup>2</sup> K, dependent on the sealed unit
Sound insulation	NPD
Air permeability	Class 4
Resistance to wind load	Class C3
Water tightness	Class 9A

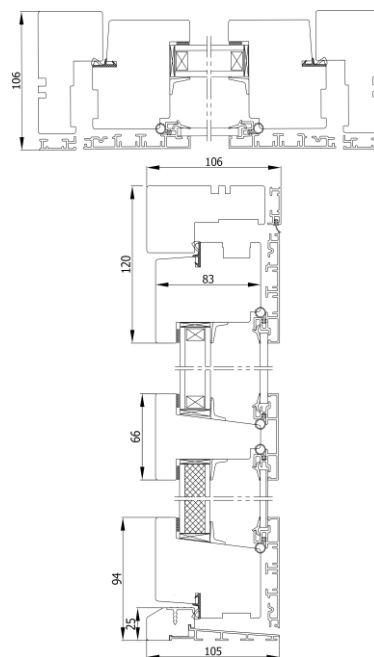

### MEASUREMENTS

Modular sizes	Outer measure of the frame = measure of the opening – 20 mm
Min./max. width	M7/M10
Min./max. height	M19/M22

### ACCESSORIES

Glazing bars	YES
Venetian blind	YES
Screen door	NO
Ventilation valve	YES

