


PROTECTUS SMU 201 CE EI60 S₂₀₀/S_a C5 FIRE RESISTANT AND SMOKE PROOF STEEL INTERNAL DOOR

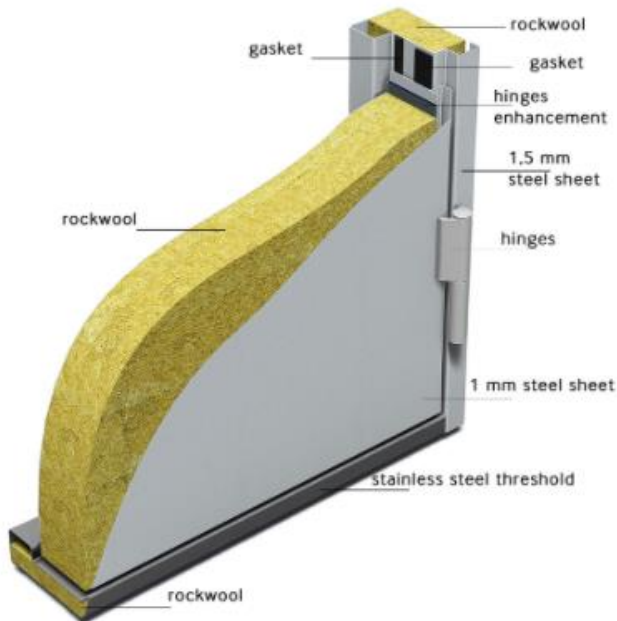

Area: Internal door

Fire class: EI60

Smoke control: S₂₀₀/S_a

Self-closing: class 5

Acoustic performance: Rw 40 dB

Thermal transmittance: U=1.6 W/m²·K

Burglar resistance: RC3 *

DETAILED INFORMATION

Produced from galvanized steel

Leaf sheet steel thickness 1,0 mm

Frame sheet steel thickness 1,5 mm

Door leaf thickness 62 mm

Door frame thickness 100 mm

Counter frame thickness up to 350 mm

FINISHING MATERIALS

Galvanized steel

Primed surface

Stainless steel AISI 304 or AISI 316L (brushed or polished finish)

Painted in RAL or NCS color (wet or powder painted)

PVC Film covered steel

Special finishing: copper, brass, lacquered steel

THRESHOLD

Standart threshold 20/35 mm or 5/20 mm

Without threshold

Mechanical threshold

GLAZING

Glass EI60 400x800mm

Round window D=420 mm

LOCKS

ASSA 565, ABLOY LC200, NEMEF 1769, GBS 81/83, BMH 1000 and other certified products

CERTIFICATION

KIWA

*tested with ASSA 7787